




AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 3912

ISSUED: 01/87

REVISED: 26 Oct 2012

ANCHOR FOR CONCEALED MOUNTING GRAB BARS ON METAL PARTITION

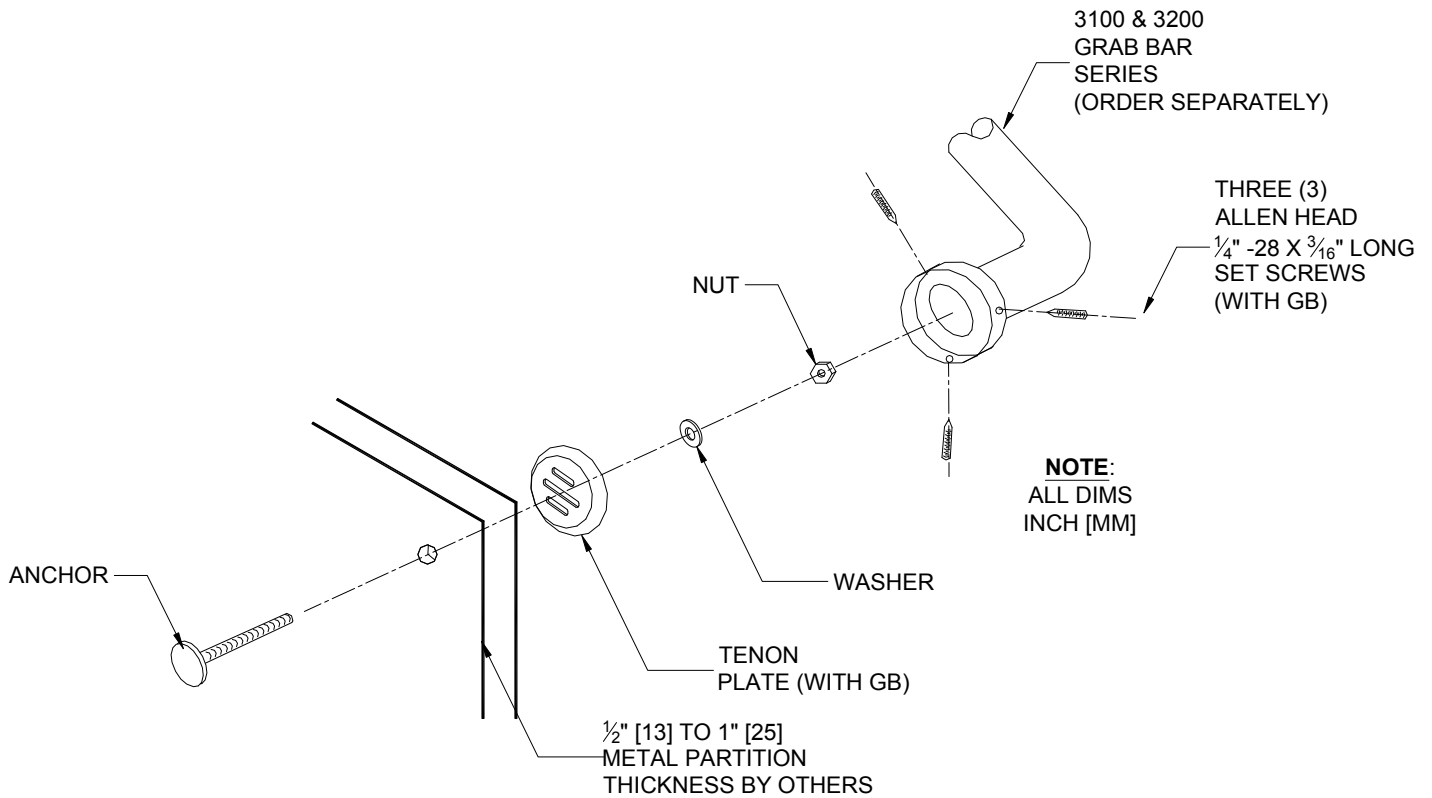

NOTE:
 ALL DIMS
 INCH [MM]

SPECIFICATION

Anchor for Concealed Mounting Series 3000, 3100 & 3200 grab bars on Metal Partition shall be a 1/8" [3] thick stainless steel plate x 3" diameter [Ø76], with a 1/4-20 x 1-1/2" [38] long threaded steel rod welded on with a washer and nut to suit. Exposed side of stainless steel plate shall have a satin finish. Anchor kit shall consist of one (1) stainless steel plate with welded on rod, one (1) each washer and nut. Specify one (1) kit **per flange**.

Anchor for Metal Partition shall be Model № 3912 as manufactured American Specialties Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

Locate centers of GB flanges and mark positions. Drill 5/16" diameter [Ø8] holes through partition at marks. Anchor is inserted through hole from far side of metal partiion. Grab bar tenon plate is then placed over and secured to threaded rod on near (grab bar side) face with a washer and steel nut (provided). For compliance with 2010 ADA Accessibility Standards install unit so that top of horizontal garb bar is 33" [838] minimum AFF to 36" [914] max. AFF, unless lower code applies.