


**FRANKLIN**  
CLEANING TECHNOLOGY



**F1390**

# Accolade™

## FLOOR SEALER/FINISH

DATA SHEET

**PRODUCT DESCRIPTION:**

**Accolade** is a versatile sealer/finish which has been formulated to protect a wide variety of non-resilient and resilient flooring materials. By blending acrylic polymer elements fortified with urethane, Franklin has combined the properties of a top quality sealer with those of a superior floor finish.

**FEATURES:**

**Versatility:**

**Accolade** simplifies floor care by providing effective sealing of porous/old floors and providing an above average gloss with a single product.

**Exceptional Gloss:**

**Accolade's** improved urethane formula provides "finish" like gloss and depth compared to traditional sealer/finish formulas.

**Repairable:**

**Accolade** will stand up to high speed burnishing and frequent detergent scrubbing.

**Clear Film:**

**Accolade** dries to a clear film and is specifically formulated to not yellow over time.

**PRODUCT SPECIFICATIONS:**

pH	8.6 ± 0.2
Appearance	Opaque White Emulsion
Fragrance	Polymeric
Freezing Point	About 32°F
% Solids	20.5 ± 0.5
Boiling Point	212°F
Solubility in Water	Dispersible
Flash Point	None
Coverage	1700 to 2000 sq. ft. per gallon (may vary due to differences in porosity of the surface)


**Slip Resistance:** Static coefficient of friction (James Machine) meets or exceeds 0.5 as determined by ASTM D2047-82.

**INGREDIENTS:**

Water	7732-15
Styrene acrylic polymer	25085-34-1
Polyethylene	9002-88-4
Diethylene glycol methyl ether	111-77-3
Tributoxyethyl phosphate	78-51-3

DILUTIONS	HEALTH	FLAMMABILITY	REACTIVITY
CONCENTRATE	NFPA 1	HMS 0	NFPA 0
CONCENTRAR		HMS	
PROPORCIÓN	SALUD	INFLAMABILIDAD	REACTIVIDAD

0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Mínimo	Mínimo	Moderar	Grave	Drástico



# Accolade™ FLOOR SEALER/FINISH


DIRECTIONS

## USE INFORMATION

Before applying Accolade remove old finish and sealer from floor using appropriate Franklin stripper and following label directions. Can be used on terrazzo, quarry tile, brick, unglazed ceramic, Mexican tile, slate, unpolished marble and all types of resilient flooring.

### INITIAL APPLICATION

### MAINTENANCE

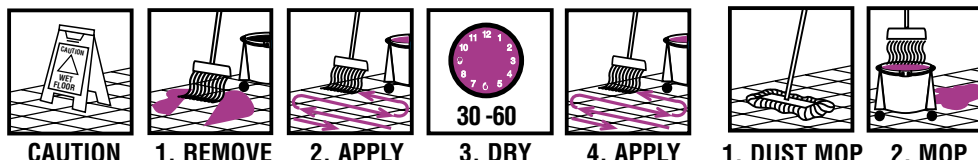

### INITIAL APPLICATION

- REMOVE** old sealer/finish following label directions using an appropriate Franklin stripper.
- APPLY** a thin coat of **Accolade** using a clean finish mop.
- DRY:** Allow 30-60 minutes drying time.
- APPLY** 3-4 additional coats. For best results allow adequate drying time between coats.

### MAINTENANCE

- DUST MOP** the floor. Remove gum, labels and other attached soils with a long-handled scraper or putty knife.
- DAMP MOP OR AUTOSCRUB** using a Franklin cleaner, following the label directions.

### FIRST AID:

**If in eyes or on skin**, immediately flush with plenty of water. Get medical attention if irritation persists. **If inhaled** remove to fresh air. Get medical attention. **If swallowed**, get medical attention. **NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON.**

### HANDLING AND STORAGE:

**SUGGESTED STORAGE TEMPERATURE:** Store inside at 40-90°F. **SPECIAL HANDLING AND STORAGE:** Handle in accordance with good industrial hygiene and safety practices. These practices include avoiding unnecessary exposure and removal of material from eyes, skin and clothing. Store in a cool and dry ventilated area. Protect from freezing. Thoroughly rinse empty containers. **KEEP OUT OF REACH OF CHILDREN.**

### PERSONAL PROTECTION:

**Respiratory Protection:** Not needed in normal use of this product.  
**Ventilation:** Use with adequate ventilation.  
**Eye Protection:** Safety glasses are optional.  
**Protective Gloves:** Protective gloves are optional.  
**Other Protective Clothing or Equipment:** Wear clothing as necessary to prevent skin contact.

### TRANSPORTATION INFORMATION:

**U.S. DOT - Proper Shipping Name:** Not regulated by DOT.  
**Marine Pollutant:** No

**MSDS RETRIEVAL**  
 Read MSDS before using this product  
**800-848-4901**  
[www.fullercommercial.com](http://www.fullercommercial.com)  
**OBTENCIÓN DE HDSM**  
 Leer la HDSM antes de utilizar este producto

**FOR CHEMICAL EMERGENCY,  
 SPILL, LEAK, FIRE, EXPOSURE OR ACCIDENT  
 CALL CHEMTREC DAY OR NIGHT  
 800-424-9300**  
**PARA EMERGENCIAS QUÍMICA DERRAMES,  
 ESCAPES, FUEGO, EXPOSICIÓN O ACCIDENTE  
 LLAMAR DE DÍA O DE NOCHE A CHEMTREC**

**TECH HOTLINE  
 800-810-4829  
 LINEA DE TÉCNICA**

