


FRANKLIN
CLEANING TECHNOLOGY



F1950

Interstate 50®

SELF SEALING, FAST RECOAT, VARIABLE UHS FLOOR FINISH

DATA SHEET

PRODUCT DESCRIPTION:

Interstate 50® is specially formulated to provide optimal performance with high speed and ultra high speed programs but works well with any maintenance system. The high solid acrylic blend provides exceptional durability, gloss and black heel resistance.

FEATURES:

Balance of Performance:

Interstate 50®'s proven performance on initial laydown, repairability and removability makes floor care easy.

Repairability:

Maintaining a high appearance level in the toughest traffic conditions is a cinch. Just clean and burnish and **Interstate 50®** keeps coming back.

Detergent Resistance:

Interstate 50® stands up to repeated autoscrubbing. It takes a lot of abuse before it needs a recoat or strip out.

Removability:

Even after repeated scrub and recoat cycles, **Interstate 50®** is easily removed from the floor. **Interstate 50®** takes the risk out of floor care and controls your floor care cost.

PRODUCT SPECIFICATIONS:

pH	9.1 ± 0.3
Appearance	Off White Liquid
Fragrance	Polymeric
Freezing Point	About 32°F
% Solids	20.5 ± 0.5
Boiling Point	212°F
Solubility in Water	Dispersible
Flash Point	None
Coverage1800 to 2200 sq. ft. per gallon

(may vary due to differences in porosity of the surface)


Slip Resistance: Static coefficient of friction (James Machine) meets or exceeds 0.5 as determined by ASTM D2047-82.

INGREDIENTS:

Water	7732-18-5
Styrene acrylic polymer	25085-34-1
Dipropylene glycol methyl ether	34590-94-8
Diethylene glycol methyl ether	111-77-3
Tributoxyethyl phosphate	78-51-3

DILUTIONS	HEALTH	FLAMMABILITY	REACTIVITY
CONCENTRATE	NFPA 1	NFPA 0	NFPA 0
CONCENTRAR	HMIS	HMIS	HMIS
PROPORCIÓN	SALUD	INFLAMABILIDAD	REACTIVIDAD

0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Mínimo	Mínimo	Moderar	Grave	Drástico




Interstate 50[®] SELF SEALING, FAST RECOAT, VARIABLE UHS FLOOR FINISH

DIRECTIONS

USE INFORMATION

Before applying Interstate 50[®] remove old sealer/finish using an appropriate Franklin stripper following label directions. For use on all resilient floors and for sealed wood, cork, terrazzo and concrete floors.

INITIAL APPLICATION

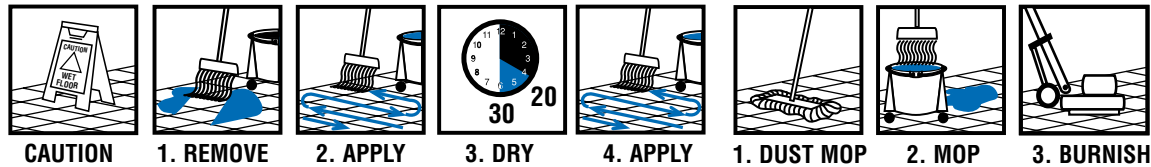

INITIAL APPLICATION

1. **REMOVE** old sealer/finish using a Franklin stripper following label directions.
2. **APPLY** a thin coat of **Interstate 50[®]** using a clean finish mop and a bucket.
3. **DRY:** Allow 20-30 minutes drying time.
4. **APPLY** a total of 4 coats. Allow adequate drying time between coats.

MAINTENANCE

1. **DUST MOP** the floor. Remove gum, labels, and other attached soil deposits with a long-handled scraper or putty knife.
2. **DAMP MOP OR AUTOSCRUB** using a Franklin cleaner and following the label directions.
3. **BURNISH** the floor after cleaning with an ultra high speed or high speed machine using the appropriate pad. *If the floor begins to look worn, an occasional scrub and recoat will decrease the need of frequent stripping.*

FIRST AID:

If in eyes or on skin, immediately flush with plenty of water. Get medical attention if irritation persists. **If swallowed,** get medical attention. NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON.

HANDLING AND STORAGE:

SUGGESTED STORAGE TEMPERATURE: Store inside at 40-90°F. **SPECIAL HANDLING AND STORAGE:** Handle in accordance with good industrial hygiene and safety practices. These practices include avoiding unnecessary exposure and removal of material from eyes, skin and clothing. Store in a cool and dry ventilated area. **Protect from freezing.** Thoroughly rinse empty containers. **KEEP OUT OF REACH OF CHILDREN.**

PERSONAL PROTECTION:

Respiratory Protection: Not needed in normal use of this product.
Ventilation: Use with adequate ventilation.
Eye Protection: Safety glasses are optional.
Protective Gloves: Protective gloves are optional.
Other Protective Clothing or Equipment: Wear clothing as necessary to prevent skin contact.

TRANSPORTATION INFORMATION:

U.S. DOT - Proper Shipping Name: Not regulated by DOT.
Marine Pollutant: No

MSDS RETRIEVAL
Read MSDS before using this product
800-551-0101
www.franklintechnology.com
OBTENCIÓN DE HDSM
Leer la HDSM antes de utilizar este producto

FOR CHEMICAL EMERGENCY,
SPILL, LEAK, FIRE, EXPOSURE OR ACCIDENT
CALL CHEMTREC DAY OR NIGHT
800-424-9300
PARA EMERGENCIAS QUÍMICA DERRAMES,
ESCAPES, FUEGO, EXPOSICIÓN O ACCIDENTE
LLAMAR DE DÍA O DE NOCHE A CHEMTREC

TECH HOTLINE
800-810-4829
LINEA DE TÉCNICA

CLEANING TECHNOLOGIES GROUP™
a division of CPAC

© FRANKLIN Cleaning Technology® 2003 • Great Bend, KS 67530

F1950TDS-0903

