

OFFENSE™

PATENTED, FAST ACTING, NO-RINSE STRIPPER

PRODUCT DESCRIPTION:

OFFENSE™ is specially formulated to quickly penetrate and effectively dissolve multiple layers of floor finish buildup for easy rinse-free removal. It can be used on vinyl, vinyl composition, vinyl asbestos, asphalt, marble, terrazzo, concrete and magnesite surfaces.

FEATURES:

No Rinsing or Neutralizing:

Rinsing is not required. Pick up the dissolved finish completely with a wet vac, mop or autoscrubber.

Safer to Use:

Works with cool water for increased worker safety.

Machine Scrubbing Not Required:

The powerful solvent action of OFFENSE™ dissolves finish buildup using only mop agitation.

Time Saver:

OFFENSE™ will reduce the time and labor required to strip floors by 40% as compared to current conventional strippers.

PRODUCT SPECIFICATIONS:

pH (concentrate) 13.0 ± .3
 Appearance Liquid, Clear to Colorless
 Fragrance Solvent
 Freezing Point About 32°F
 Solubility H₂O Complete
 Flash Point None

INGREDIENTS:

Water 7732-18-5
 Ethylene glycol phenyl ether 122-99-6
 Sodium 1-octane sulfonate 5324-84-5
 Monoethanolamine 141-43-5
 2-Butoxyethanol 111-76-2

DILUTIONS	HEALTH	FLAMMABILITY	REACTIVITY
CONCENTRATE CONCENTRAR	NFPA 3 HMIS	NFPA 0 HMIS	NFPA 0 HMIS
(1:4 RATIO) (1:4 RAZON)	NFPA 1 HMIS	NFPA 0 HMIS	NFPA 0 HMIS
PROPORCIÓN	SALUD	INFLAMABILIDAD	REACTIVIDAD

0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Mínimo	Mínimo	Moderar	Grave	Drástico

ECOLOGICAL INFORMATION:

- Biodegradable Surfactants
- Basic pH
- No Phosphates

DATA TECH SHEET


OFFENSE™ PATENTED, FAST ACTING, NO-RINSE STRIPPER

DIRECTIONS

USE INFORMATION

Before stripping, always dust mop the floor and remove gum, labels and other attached soil deposits with a long handled scraper or putty knife. **OFFENSE™** can be used on vinyl, vinyl composition, vinyl asbestos, asphalt, marble, terrazzo, concrete and magnesite floors. Always use "CAUTION" signs.

MOP ON - MOP OFF

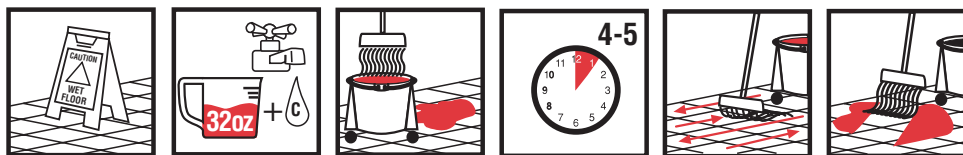

CAUTION

1. MIX

2. MOP

WAIT

AGITATE

3. REMOVE

MOP ON - MOP OFF

1. **MIX:** Dilute at 32 ounces per gallon (1:4 ratio) of **cool** water.
2. **MOP** the diluted solution of **OFFENSE™** onto the floor. Let stand for 4-5 minutes, then **agitate** with the same mop. Do not allow solution to dry.
3. **REMOVE** the remaining solution off the floor using a mop or wet vacuum.
4. **REPEAT** steps two and three if any finish remains on floor. Rinsing may be required for dilutions stronger than 1:4.

SPECIAL PRECAUTIONS: Use caution as floors become very slippery. Must be diluted. Not for use on wood or painted surfaces. Not for use on linoleum or rubber floors or daily maintenance of resilient floors. Before use on asphalt tile, test a small hidden area for any color change.

FIRST AID:

If in eyes or on skin, immediately flush with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Get medical attention. **If inhaled,** remove to fresh air. Get medical attention. **If swallowed,** get medical attention. NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON. Contains 2-Butoxyethanol which may cause damage to the liver, kidneys and blood forming system.

HANDLING AND STORAGE:

SUGGESTED STORAGE TEMPERATURE: Store inside at 40-90°F. **SPECIAL HANDLING AND STORAGE:** Handle in accordance with good industrial hygiene and safety practices. These practices include avoiding unnecessary exposure and removal of material from eyes, skin and clothing. Store in a cool and dry ventilated area. **Protect from freezing.** Thoroughly rinse empty containers. **KEEP OUT OF REACH OF CHILDREN.**

PERSONAL PROTECTION:

Respiratory Protection: A respirator may be required in poorly ventilated areas. (see MSDS)

Ventilation: Use with adequate ventilation.

Eye Protection: Safety goggles w/face shield required.

Protective Gloves: Protective gloves required.

Other Protective Clothing or Equipment: Wear clothing as necessary to prevent skin contact.



TRANSPORTATION INFORMATION:

U.S. DOT-Proper Shipping Name: Ethanolamine Solution

Hazard Class: 8, Corrosive

ID Number: UN2491

Packing Group: III

Marine Pollutant: No

MSDS FAX RETRIEVAL
Read MSDS before using this product

800-551-0101

OBTENCIÓN DE HDSM POR FAX
Leer la HDSM antes de utilizar este producto

FOR CHEMICAL EMERGENCY
SPILL, LEAK, FIRE, EXPOSURE OR ACCIDENT
CALL CHEMTREC DAY OR NIGHT

800-424-9300

PARA EMERGENCIAS QUÍMICA DERRAMES,
ESCAPES, FUEGO, EXPOSICIÓN O ACCIDENTE
LLAMAR DE DÍA O DE NOCHE A CHEMTREC

TECH HOTLINE
800-810-4829
LINEA DE TÉCNICA