




Square Cat XT Series™

Oscillating Floor Machines

Proven Performance

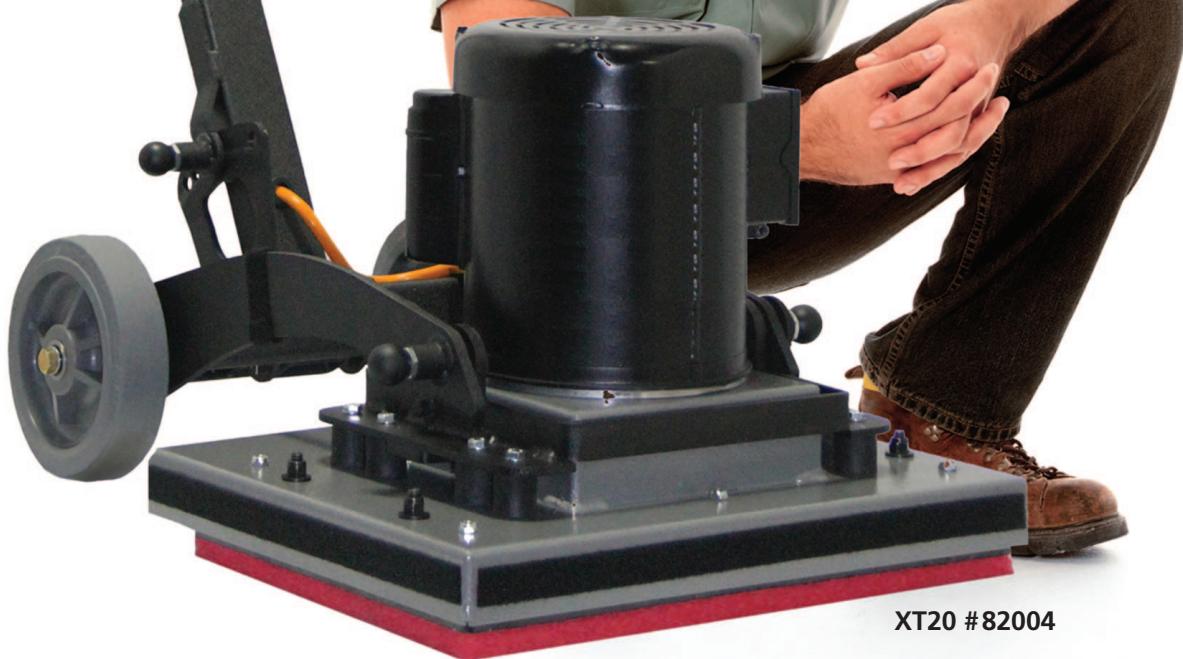

XT20 #82004

Better Floor Care Results, Faster, with Less Fatigue

FAST — Remove coatings from virtually any hard surface floor at 3,200 sq. ft./hr., saving time and labor costs.

COMPLETE COVERAGE — Rectangular pads scrub from edge to edge, including corners to eliminate extra steps.

ERGONOMIC — Industry leading design is comfortable, eliminates vibration to the operator, and is whisper quiet.

GREEN FRIENDLY — Eliminates the need for harsh chemicals and protects our environment.



Square Cat XT10



- Perfect for tight areas.
- Versatile – for use on VCT, rubber and cork.
- Quieter and easier to operate than standard floor machines.


Square Cat XT20



- Excellent for chemical-free only strip or scrub process.
- Removes layers of finish without chemicals.

SSS Square Cat XT Series™ Features

- Motors use less electricity for an improved Green foot print.
- Six primary and eight secondary isolators for complete vibration elimination (XT20 models).
- Large, non-marking wheels for effortless transport.
- Transport Cart included with 20" & 14" models.
- Commercial grade cord, switch, grips, and fasteners extend life cycle and value.
- Multiple position, adjustable handle makes operation easy for all personnel.
- Meets UL's stringent specifications for safety.
- Proudly assembled in America.

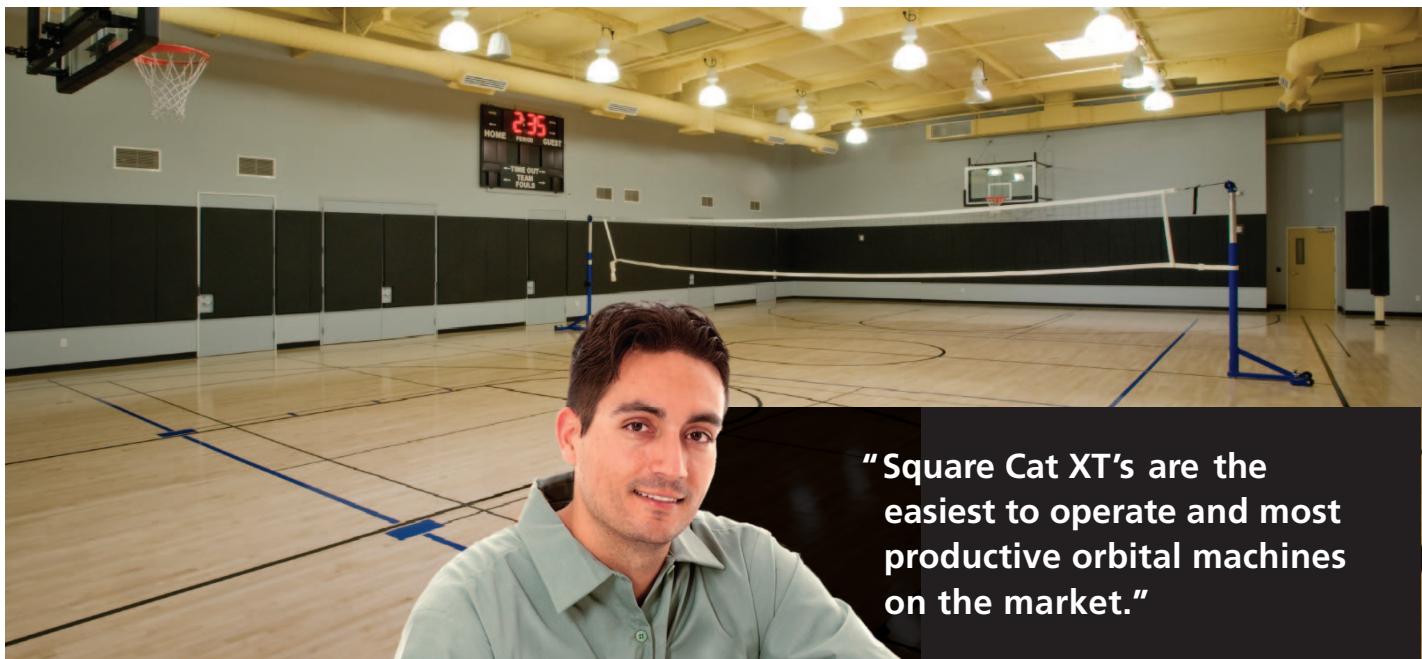

"Square Cat XT's are the easiest to operate and most productive orbital machines on the market."

Square Cat XTS20



- Built-in Sprayer.
- Puts user in control of placing cleaning solution.
- Save time and labor.

Square Cat XTV20



- Vacuum Dust Containment.
- Clean and pick up dust in one step.
- Excellent for healthcare facilities and for markets with zero tolerance dust regulations.



The Square Cat XT is available in a 28" size for larger spaces. The 40% increased coverage reduces labor while maintaining precise control. Prepare 4,200 sq. ft./hr. with this larger model.



Square Cat XT Series™ Oscillating Floor Machines

Specifications

Model #	XT10	XT20 / XTS20* / XTV20**
Item #	82003	82004 / 82005 / 82006
Pad Size/Cleaning Path	14" x 10"	20" x 14"
Coverage Rate	1,800 sq. ft./hr.	3,200 sq. ft./hr.
Pad Driver Type	Combination Floor Pad/DPD	Combination Floor Pad/DPD
Motor	0.5 HP, TEFC AC Motor	1.5 HP, TEFC 180 Frame AC Motor
Oscillations	1725 RPM	1740 RPM
Amp Draw	< 9	< 8
Extended Wear Vibration Compensators	4 Primary, 2 Secondary	6 Primary, 8 Secondary
Maintenance Intervals	600 Hours	600 Hours
Wheels	5"dia. x 1"wide Ball Bearing	8"dia. x 2"wide Ball Bearing
Pad Pressure	0.57 lbs./in.	0.71 lbs./in.
Power Cord	1 Piece 50' Black 14-3 SJTOW	2-Piece 55' Safety Orange 12-3 SJTOW
Weight	107 lbs.	250 lbs./259 lbs./269 lbs.
Shipping Weight	142 lbs.	285 lbs./294 lbs./304 lbs.
UL Rated	✓	✓
Warranty†	1 Year Parts & Labor	1 Year Parts & Labor

*XTS20 includes a 2-Gallon Solution Tank

**XTV20 includes a Dust Containment with Active Vacuum Solution Spray with 4.5 Gallon Tank

†See manual for complete details.

Product specifications subject to change without notice.



Floor Pads

Item#	Size	Description	Pack
31269	20" x 14"	SSS Eco 1000 Maroon Strip-Prep Pad	10/cs.
31240	20" x 14"	SSS Black Strip Pad	5/cs.
31252	20" x 14"	SSS Red Buff Pad	5/cs.
31244	20" x 14"	SSS Blue Scrub Pad	5/cs.