



Polishing, Spray Buffing and Burnishing

Aqua Burnish

A superior soft pad that lightly polishes the floor for a reflective appearance.

Red Spray Buff 40-D

A versatile pad that cleans when wet, buffs when dry and leaves floors glistening. May be used from 175 RPM to 1500 RPM.

White High Lustre

Used when polishing at 175 - 350 RPM for that high gloss look.

Beige Polythermal

The unique rubberized binder possesses heat generating characteristics and works especially well with propane powered machines.

Yellow High Speed and the 100-D Polythermal Pads

Ideal pads for use with electric or battery powered machines. May also be used for 1200 + RPM spray buffing. They are most effective on soft to medium finishes.

Natural Fiber Buff/Burnish

Here is an aggressive pad for use on medium to hard finishes. It minimizes burnishing time by quickly removing scratches. May also be used for spray buffing.

PT 3000

Want to extend the life cycle of the floor and reduce time-consuming top scrubbing, recoating or stripping? This Production Tool is the supreme choice for softer finishes. PT 3000 can be used on medium to hard finishes as well. Versatile, this one tool works with electric, battery and propane. The PT 3000 quickly restores the shine thus eliminating the manpower and material costs associated with recoating for one or more extra cycles. You can actually calculate the savings when you use this Production Tool.

Ultra High Speed Tan

Here is a buffing pad that can be used on medium/hard finishes, with virtually any machine to produce a wet look gloss.

Natural Light

This exceptional floor pad effectively combines natural hair and fiber in a new, advanced way. This will bring out the gloss on softer, more buffable floor finishes.

Natural Poly Burnish

A blend of synthetic fibers and natural hair. This pod lasts longer with the added benefit of the lubricating effect of natural hair.

SSS Floor Maintenance Pads

SSS Floor pads are constructed with high quality fiber and are saturation coated for consistent performance throughout the life of the pad. Their open web design reduces buildup on the face of the pad for faster stripping, scrubbing, cleaning, polishing and burnishing.

Select the pad to match your job, equipment and specifications. The performance of the pad is dependent upon the machine used, the RPM

it can generate, the floor finish being used and, finally, your own personal evaluation of the results. We suggest that you consult the chart below and try several combinations and select the best as you see it.

To assist you in your selection, we have provided some general information throughout this brochure that should be helpful.

What floor pad to recommend?

APPLICATION	MACHINE RPM	CLEANING SOLUTION/WET	PAD RECOMMENDATION	RESULTS	
STRIPPING	175 - 350	Cleaning Solution/Wet	PT 2000 - most aggressive Super Stripper - economical Black Stripper Brown Stripper - least aggressive	Removal of all finish, wax build up and dirt down to the original surface.	
SCRUBBING	175 - 350	Cleaning Solution/Wet	Green Scrubbing - most aggressive Blue HD Scrubber Regular Red Spray Buff - automatic scrubbers	Thoroughly clean all dirt and some finish from heavily soiled floors.	
SPRAY BUFFING	175 - 350	Spray Buff Solution/Wet	1. Regular Red Spray Buff	Spray buff solution will clean when wet and shine when dry. Sometimes called "Restoring" the finish.	
	350 - 1500	Spray Buff Solution/Wet	1. Red Spray Buff 40-D		
POLISHING	175 - 350	Dry or light water mist	Tan Buff White High Lustre (higher gloss)	Polishing a clean dry floor. Upgrading the appearance after scrubbing or spray buffing.	
	350 - 1500	Dry or light water mist	1. Red Spray Buff 40-D		
BURNISHING 1500 - 3000 Battery or Electric Machines 2000 Propane machine		Dry	See following chart.	Applying heat and friction using ultra high speed machines to produce a "high" shine and harden the finish. "Levels" the finish.	

SSS Burnishing Pad Recommendations

MACHINE	ELECTRIC	ELECTRIC/BATTERY	PROPANE	
TYPE	1500 RPM	2000 RPM	2000 RPM	
SOFT	1. PT 3000	1. Aqua Burnish	1. PT 3000	
FINISH	2. Beige Polythermal	2. PT 3000	2. Aqua Burnish	
MEDIUM	1. Ultra-High Speed Tan	1. Ultra-High Speed Tan	1. Beige Polythermal	
FINISH	2. Natural Light	2. Natural Light	2. Ultra-High Speed Tan	
HARD FINISH	Natural Poly Natural Fiber Buff/Burnish	Natural Poly Natural Fiber Buff/Burnish		



Our Coconut Pad and Walnut Pad are exceptional floor pads that provide an outstanding cleaning performance. Coconut fibers produce a pleasant aroma, naturally lubricate the floor surface, and create a beautiful high-gloss shine. Walnut shells, when combined with coconut fibers, clean as well as shine. For burnishing and light cleaning, the natural choice is the revolutionary Coconut Pad and Walnut Pad.

Coconut Pad (Burnishing)


1000+ RPM burnish softer to medium finishes

Walnut Pad (Cleaning & Shining)

175 - 350 + RPM for light cleaning 1000 + RPM burnishes harder finishes



The Contour Pad System makes scrubbing and polishing uneven floor surfaces much easier. With more vertical fibers per square inch, Contour Pads actually mold to the cleaning task and reach every micro groove for deep down results. Contour Pads use less chemicals, are machine washable and perfect for use with Travertine™ marble, slate, quarry tile, rubberized safety floor, ceramic and terrazzo floors. No other pad or brush comes close.





Contour Deep Scrub (Blue Stripes)

May be used dry or wet (fine water or neutral cleaner spray) to loosen deeply embedded soils on high to medium floor variances, such as grooved or pegged rubberized safety flooring, Travertine ™ marble (natural or synthetic), spanish tile, and any deeply or largely grouted floors. 175 - 350 RPM.

Contour Dry Polish (Lime Green)

Use on any uneven or smooth surface flooring such as hardrock maple, parquet, Travertine ™ marble, rubberized safety flooring, ceramic, quarry, spanish tiles or any commercial flooring, on which a soft, buffable type finish is being used. 175 - 3000 RPM.



Stripping Boots


Go ahead, slip 'em on. Our Stripping Boots provide better traction on wet surfaces to reduce your risk of slipping. Better yet, they keep your footwear dry and away from harsh chemicals.

Stripping boot replacement soles are made from the same material as a stripping pad and can be used to "clean" a tough area without bending or using extra tools.

SSS Sandscreens

Sandscreens are an open mesh heavily coated with silicon carbide abrasive and thermoset resins. The open mesh construction resists loading thereby extending the life of the product.

They are designed for sanding and "roughing up" wood and concrete floor coatings in preparation for applying finish coatings. Sandscreens are available in 60, 80, 100, 120, 150 and 180 grit sizes. The 60 & 80 grits are often recommended for the removal of concrete coatings and the 100 & 120 grits for screening between coats of seals and finishes.

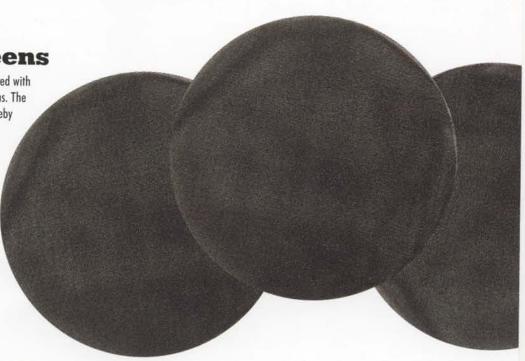



PT System

Why pay for a pad when you can get a Production Tool that pays for itself. The Production Tool System is unique to Triple S. These tools are manufactured to specific tolerances in fiber, grit and mesh design. As a result, each one meets and exceeds the performance demands of floor care in response to machine and surface requirements. Because they work faster and last longer, these tools save labor time and money while they do the job right! Free up your staff to get to other jobs by letting these Production Tools speed up your work.

Call or visit our web site for information on these other quality Triple S products.

- Washroom Sanitation
- Odor Control
- Disinfectants
- Mopping Equipment
- Specialty Cleaners
- Mats
- Dust Control
- Floor Maintenance Equipment
- Carpet Maintenance
- Vacuum Cleaners
- Wood Floor Care
- Resilient Floor Care
- Industrial Cleaning Supplies



Distributed By: